

# SLIDE ARM BARRIER



The Slide Arm Barrier can be used to limit vehicle access to an area or road. It can be rolled open or closed easily by a single person, and locked in the closed position. The Slide Arm Barriers are listed on GS Contract number GS-07F-9574S.


When anchored the Slide Arm Barrier is can effectively stop a 4000 pound vehicle traveling up to 20 mph. Anchoring can be accomplished by using concrete anchors or placing ballast on the frames to hold barrier in place.

The Slide Arm Barrier is shipped unassembled on a skid that is 8' long x 6.5' wide x 5' tall, (See Photo). It can be easily recovered for use at another location or storage.

For visibility, alternating beams are yellow and black. To increase visibility at night, prismatic reflective tape (available as an option) can be attached to the beam.



Item Description:	Item Number:	Opening Width:	Installed Gate dimensions:	Shipping Weight:
Slide Arm Barrier w/ Wide Frame - 12'	SG-12WF	12 Feet	20' (long) x 8' (wide) x 4' (tall)	2600 pounds
Slide Arm Barrier w/ Wide Frame - 16'	SG-16WF	16 Feet	24' (long) x 8' (wide) x 4' (tall)	2700 pounds
Slide Arm Barrier w/ Wide Frame - 20'	SG-20WF	20 Feet	28' (long) x 8' (wide) x 4' (tall)	2800 pounds
Slide Arm Barrier w/ Wide Frame - 24'	SG-24WF	24 Feet	32' (long) x 8' (wide) x 4' (tall)	2900 pounds
Slide Arm Barrier w/ Wide Frame - 28'	SG-28WF	28 Feet	36' (long) x 8' (wide) x 4' (tall)	3000 pounds

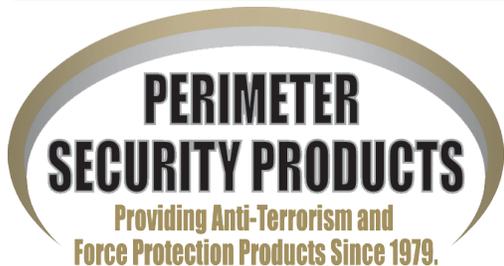

## PERIMETER SECURITY PRODUCTS

Email: [sales@soacorp.com](mailto:sales@soacorp.com)

265 East Bell Drive, Warsaw, IN

260-459-0456 (office)

1-800-860-2855 (tollfree)

260-459-0929 (fax)

[www.perimetersecurityproducts.com](http://www.perimetersecurityproducts.com)