

SLIDE ARM BARRIER




The Slide Arm Barrier can be used to limit vehicle access to an area or road. It can be rolled open or closed easily by a single person and locked in the closed position. The Slide Arm Barriers are listed on GSA Contract Number: 47QSMS26D005U.

When anchored the Slide Arm Barrier can effectively stop a 4,000 lbs. vehicle traveling up to 20 mph. Anchoring can be accomplished by using concrete anchors or placing ballast on the frames to hold barrier in place.

The Slide Arm Barrier is shipped unassembled on a skid that is 5'H x 6.5'W x 8'L (See Photo). It can be easily recovered for use at another location or storage.

For visibility, alternating beams are yellow and black. To increase visibility at night, prismatic reflective tape (available as an option) can be attached to the beam.

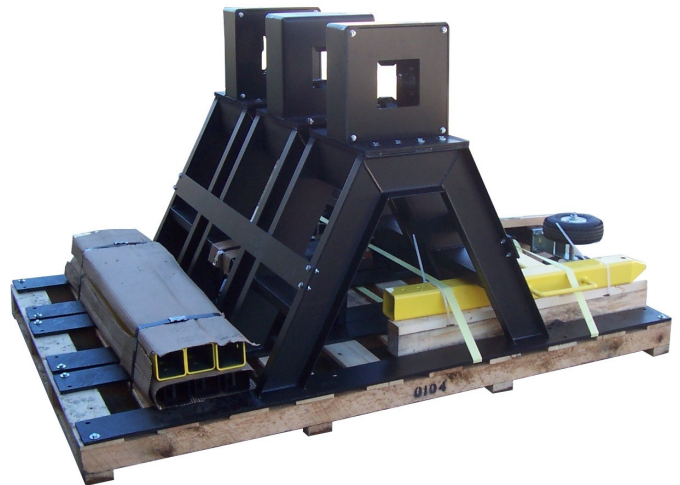

Part No.	Description:	Opening Width:	Installed Gate Dimensions:	Shipping Weight:
SG-12WF	Slide Arm Barrier w/ Wide Frame - 12'	12'	4' H x 8' W x 20' L	2,600 lbs.
SG-16WF	Slide Arm Barrier w/ Wide Frame - 16'	16'	4' H x 8' W x 24' L	2,700 lbs.
SG-20WF	Slide Arm Barrier w/ Wide Frame - 18'	18'	4' H x 8' W x 28' L	2,800 lbs.
SG-24WF	Slide Arm Barrier w/ Wide Frame - 24'	24'	4' H x 8' W x 32' L	2,900 lbs.
SG-28WF	Slide Arm Barrier w/ Wide Frame - 28'	28'	4' H x 8' W x 36' L	3,000 lbs.

PERIMETER SECURITY PRODUCTS

Email: sales@soacorp.com
265 East Bell Drive, Warsaw, IN
260-459-0456 (office)

www.perimetersecurityproducts.com